

# NorthEast Monitoring, Inc.

*advancing Holter technology™*

## DR180+ Digital OxyHolter® Recorder, 3CH

Meets EC-38  
standard



Ergonomic  
design



Proven  
reliability



Maximize  
Holter  
reimbursements



Reduce artifact  
with shielded  
cables




Pacemaker  
detection  
standard




Foreign  
language  
interfaces



Industry-leading  
3-year warranty

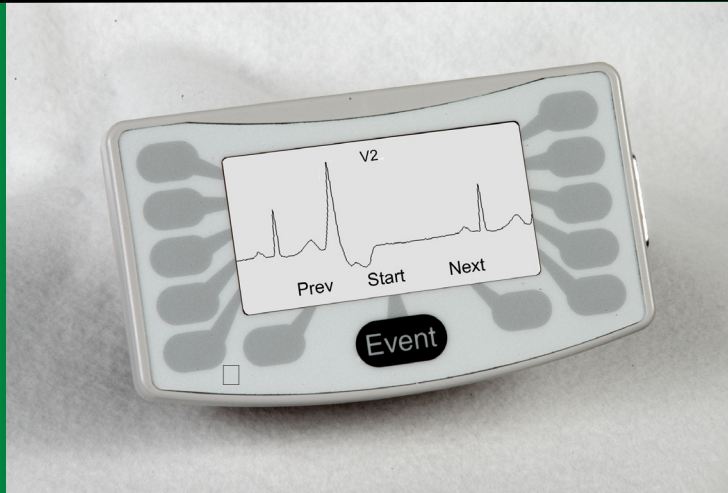

## Saturated Oxygen Analysis



With synchronized sets of data -- cardiac (standard Holter) and pulmonary (saturated O<sub>2</sub> levels via pulse oximetry), the OxyHolter® represents a quantum step in your ability to isolate or correlate cardiac and pulmonary issues. OxyHolter® includes a specially designed, proprietary, active-electronics Holter-and-pulse-oximetry cable and an extra 5- or 7-lead cable.

DME's (in conjunction with IDTF's and medical professionals) use OxyHolter® to substantiate or "fine tune" beneficiary's oxygen requirements. With an accurate tool like OxyHolter®, O<sub>2</sub> levels are optimized to determine replenishment schedules. The savings derived drop directly to the "bottom line" of a DME provider and quickly provide an ROI for OxyHolter®.

OxyHolter® is designed with the following three goals in mind: ease-of-use for the patient and clinician, accuracy of data and durability of the unit. Large programmable soft-keys, easy-to-read, multi-line LCD and several foreign language options are among the features that distinguish this "tried and true" unit.

OxyHolter® performs as well in a small practice as in a large clinic or full service (scanning) providers. Built-in safeguards insure deployment with sufficient battery levels, high-quality lead hook-ups and complete patient ID.

All units are rugged and built to last. They carry the industry's best warranty of 3 years, along with optional extensions to 5 or more years. Choose the best unit for your application.

A number of key features make these units the quality and technology leader in the industry today. Contact NorthEast or read on for more details.


# DR180+ OxyHolter® Features

- ◆ **Meets EC-38 standard**  
*Meets applicable sections of ANSI/AAMI ED38-1994 "Ambulatory Electrocardiographs."*
- ◆ **Ergonomic design**  
*Large, easy view screen and soft-keys make the unit exceptionally easy to use. The large Event marker button operates in conjunction with interactive and customizable patient diary via user-programmable soft-keys.*
- ◆ **Proven reliability**  
*Hundreds of Holter units are in use worldwide. Real-world experience is designed into every unit.*
- ◆ **Maximize Holter reimbursements**  
*Our system allows your office to "capture" reimbursement for all applicable CPT (Current Procedural Terminology) codes for Holter. Removable digital storage memory (compact flash) allows rapid re-deployment of the unit to the next patient*
- ◆ **Reduce artifact with shielded cables**  
*Shielded cables provide better signal integrity and noise immunity. Our cables are carefully shielded and impedance matched and provide better SNR than any other cable on the market. Active electronics built into the cable accurately capture oximetry data.*
- ◆ **Pacemaker detection standard**  
*The conflicting requirements for signal sensitivity (wide bandwidth and high sample rate) and long battery life have been uniquely resolved to provide highly accurate diagnostic information.*
- ◆ **Foreign language interfaces**  
*Multiple foreign languages are programmed into each unit to suit diverse patient populations.*
- ◆ **Industry-leading 3-year warranty**  
*These units are built-to-last. Our field return rate is proven to be so low that we can offer the industry's longest warranty -- and then extend that to 5 or more years to add even more value to your investment.*
- ◆ **Manage O<sub>2</sub> therapy and screen for sleep disorders**  
*Twenty-four hours of SpO<sub>2</sub> data correlated with 2 channels of cardiac data allow quantitative observations (value and trend) of response to O<sub>2</sub> variations. Proprietary tool removes artifact from HR and O<sub>2</sub> data.*
- ◆ **Cable options**  
*May be used with Oxymetry (oxy plus 5-lead), 5-lead, or 7-lead cables.*
- ◆ **Maximize good quality recording cycles**  
*Checks battery state, lead hook-up quality, date and patient ID on LCD prior to deployment. No mix-ups with patient data because patient ID is encoded on memory card.*
- ◆ **All digital recording**  
*Reliable digital technology is used throughout, enhancing service life and lowering total cost of ownership.*
- ◆ **Compatible with NorthEast LX® Analysis software**

FDA K004007

NB: In the U.S.A., Federal Law restricts devices to sale by or on the order of a physician. For in vitro diagnostic use. Not intended to replace real-time telemetry monitoring for patients suspected of having life-threatening arrhythmias.

September, 2006



## NorthEast Monitoring, Inc.

Two Clock Tower Place, Suite 555  
Maynard, MA 01754 U.S.A.  
www.nemon.com

phone: 978-461-3992  
fax: 978-461-5991  
toll free: 866-346-5837



0413

*A New Approach  
for Evaluation and  
Management of  
Cardio-Pulmonary  
Diseases*

## DR180+ OxyHolter® Specifications

### Recording duration:

72 hours, with lithium batteries  
48 hours, with alkaline batteries  
24 hours, with rechargeable batteries

### Recording bandwidth:

0.05 - 70 Hz

### Resolution:

12-bit, 12.50 µV/LSB

### Pre-filter sampling rate:

360 samples/second

### Dimensions:

12 cm x 7 cm x 2.5 cm  
(4.7 in x 2.7 in x 1.0 in)

### Weight:

200 grams (7 oz.), including batteries and memory card  
142 grams (5 oz.), without batteries

### Power:

2 AA batteries: alkaline, rechargeable or lithium

### Storage capacity:

32 MB - 1 GB compact flash

### Distributed by:

**Heart Smart Inc.**

Tel: 631 676-3749 ext 1

Fax: 631 676-3778

email: info@heartsmartinc.com